

Huawei AR502H Data Sheet (Edge Computing Scenario)




The AR502H is purpose-built for edge computing and industrial gateway scenarios. This data sheet focuses merely on the edge computing scenario.

Overview

Huawei AR502H is an EC-IoT gateway designed for communication on large-scale edge computing and IoT networks with challenging environments such as extreme temperature, humidity, and electromagnetic interference.

The AR502H is purpose-built for edge computing and industrial gateway scenarios. This data sheet focuses merely on the edge computing scenario. For details about the industrial gateway scenario, see the data sheet for the industrial gateway scenario.

Appearance of Huawei AR502H

Product Name	Overview	Application Scenario
 <p>AR502H</p>	<p>AR502H router:</p> <ul style="list-style-type: none"> Industry-grade and high-performance edge computing Fan-free and dual-power supply redundancy design ARM quad-core A53, 2 GB memory, 2 GB flash 	<p>Industry-grade edge computing scenarios</p>
 <p>NetEngine AR502H-5G</p>	<p>NetEngine AR502H-5G router:</p> <ul style="list-style-type: none"> Industry-grade and high-performance edge computing Fan-free and dual-power supply redundancy design ARM quad-core A53, 2 GB memory, 2 GB flash 5G, LTE TDD, LTE FDD, WCDMA 	<p>Industry-grade edge computing scenarios</p>
 <p>iCUBE-PLC100 (optional)</p>	<p>Box-shaped PLC communication unit:</p> <ul style="list-style-type: none"> Built-in power supply, enabling independent deployment IPv6 and automatic addressing Ethernet to PLC 	<p>PLC communication scenarios</p>

Features and Highlights

Edge IoT, Enhancing Security and Reliability

- Edge computing architecture, open software and hardware resources, support for multi-container management, and on-demand app deployment
- Standard Debian-based development environment, and a wide variety of SDKs for flexibly invoking compute, storage, and network resources
- Mainstream IoT communication protocols, such as MQTT and CoAP
- Data encryption, non-privileged containers, and dual-partition backup, enhancing device security and reliability

High-Quality, Industrial-Grade Design

- Fan-free design, wide operating temperature range, from -40°C to $+70^{\circ}\text{C}$
- Resilient to strong magnetic interference
- IEC 61850-3/IEEE 1613 compliant
- Dual power supplies for redundancy, DI/DO alarm

Extensive Interfaces, Enabling Flexible Expansion


- LTE FDD and LTE TDD, compatibility with WCDMA, GPRS, and GSM
- 5G NR SA and NSA, LTE FDD and LTE TDD, compatibility with WCDMA/GPRS
- Multiple interfaces, including GE, RS232, RS485, and DI/DO
- M.2 hard drive interface, scalability to up to 256 GB (provided by customers)
- Support for all global positioning systems: BeiDou, GPS, Galileo, and GLONASS

Simple Deployment and Easy O&M

- Cloud-based management through Agile Controller-IoT
- Visualized configuration, user-friendly GUI
- Remote container and app management, batch configuration and upgrade


Application Scenarios

IoT Pole

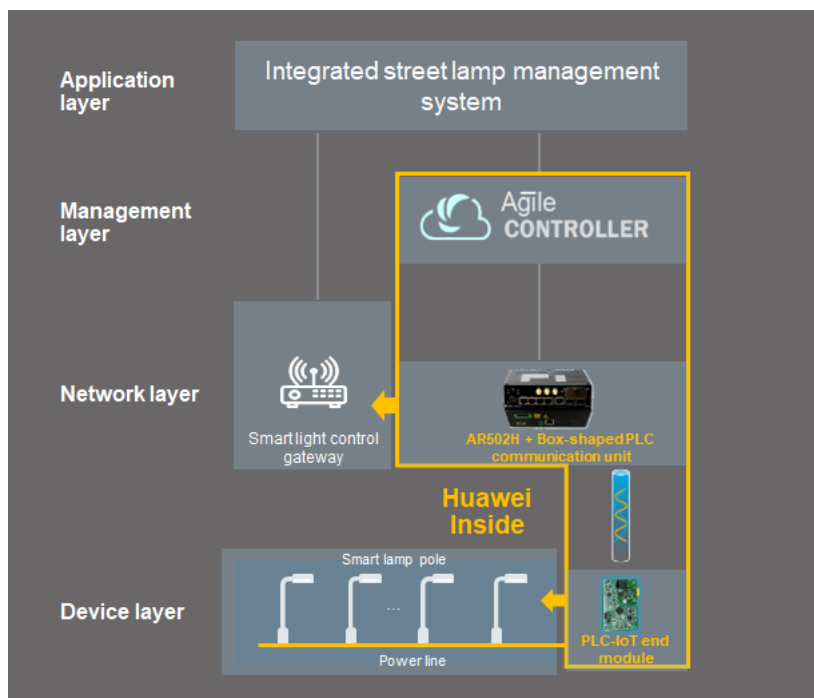

Huawei AR502H, a smart light control gateway, integrates remote control, local management, computing, and communication functions. It uses IP-based PLC to connect and manage large numbers of smart lamp poles. In addition, it supports deployment of light control service applications, and provides multiple types of light control adjustment solutions, thereby delivering improved lighting quality with lower energy consumption.

Smart IES

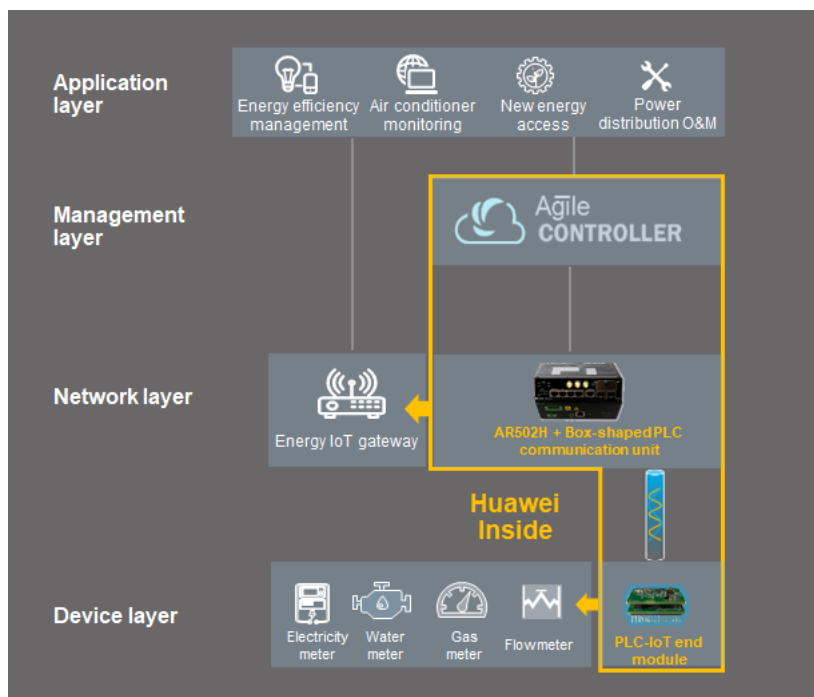

Huawei AR502H, a smart Integrated Energy Service (IES) IoT gateway, integrates remote control, local management, computing, and communication functions. The AR502H has multiple built-in containers, supports on-demand deployment of service apps, and works with the backend platform to display network-wide alarm status, site status, and device status. This achieves remote visualized management and real-time network monitoring.

Product Specifications

Specification	AR502H	NetEngine AR502H-5G
Hardware parameters		
Case	Die-casting	
Processor	ARM quad-core A53, 1 GHz	
DDR	2 GB, DDR4	
Flash	2 GB, SLC NAND	
Fixed Ethernet port	<ul style="list-style-type: none"> 3 x GE electrical ports, 10/100/1000 Mbit/s auto-sensing 2 x GE combo 	
Fixed serial interface	2 x RS485 or RS232 (isolated; switching between RS485 and RS232 is controlled through software)	
Alarm port	<ul style="list-style-type: none"> One DI port (passive contact input) One DO port (industrial terminal, supporting normally open and normally 	

Specification	AR502H	NetEngine AR502H-5G
	closed)	
USB 3.0	1	
Console port	1	
EN-DC		B1+n77/n78 B2+n78 B3+n41/n77/n78 B4+n78 B5+n78 B7+n78 B8+n41/n77/n78 B12+n78 B18+n77 B19+n78 B20+n78 B25+n41 B26+n41 B28+n77/n78 B38+n78 B39+n41 B40+n78 B41+n77 B66+n78
5G	-	5G NR SA: n1/n2/n3/n5/n7/n8/n12/n20/n25/n28/ n38/n40/n41/n48/n66/n71/n77/n78/n 79 5G NR NSA: n41/n77/n78/n79
4G/LTE	FDD LTE: Band 1/2/3/5/7/8/20	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B9/B12/B13/ B14/B17/B18/B19/B20/B25/B26/B28 /B29/B30//B32/B66/B71 LTE TDD: B34/B38/B39/B40/B41/B42/B43/B46 /B48

Specification	AR502H	NetEngine AR502H-5G				
3G	DC-HSPA+/HSPA+/HSPA/WCDMA: Band 1/2/5/8	WCDMA B1/B2/B3/B4/B5/B8/B19				
GSM	GSM/GPRS/EDGE: 850/900/1800/1900 MHz	-				
SIM card	<ul style="list-style-type: none"> Micro-SIM 					
RTC/Overtemperature alarm	Supported					
Global positioning system	BeiDou, GPS, Galileo, and GLONASS					
Reset/Configuration	Reset/Configuration button: used to manually restore factory default settings (hold down for at least 5 seconds) or to reset the router (hold down for less than 5 seconds).					
M.2 hard drive interface	Supported M.2 2242 SSD (using a SATA bus; industrial-grade SSDs provided by customers), scalable up to 256 GB					
LED indicators	2 x PWR, 1 x SSD, 1 x SIM, 1 x GPS, 1 x 2G, 1 x 3G		2 x PWR, 1 x SSD, 1 x SIM, 1 x GPS, 1 x 3G			
		2G LED	3G LED		3G/4G LED	NR LED
	2G	√	-	3G	√	-
	3G	-	√	4G/LTE	√	-
	4G/LTE	√	√	5G SA	-	√
				5G NSA	√	√
Power supply	Dual DC power supplies: 9.6 V to 60 V (industrial terminal)					
Dimensions (H x W x D)	44 mm x 150 mm x 133 mm (1.73 in. x 5.91 in. x 5.24 in.)					
Net weight	1.1 kg					
Typical power consumption	< 8.5 W (excluding optical modules)					
Installation mode	DIN/wall-mounted					
Storage temperature	-40°C to +85°C					
Operating temperature	-40°C to +70°C					
Operating humidity	5% to 95% (non-condensing)					
IP rating	IP30					

Specification	AR502H	NetEngine AR502H-5G
EMC standards compliance	<ul style="list-style-type: none"> • IEEE 1613 • IEC 61850-3 • EN 61000-6-5 (2009+2013) 	
Safety regulations	<ul style="list-style-type: none"> • IEC 60950-1 • IEC 61850-3 	
Certification mark	Conformite Europeenne (CE)	
EC-IoT parameters		
Maximum built-in flash for containers	1 GB	
Scalable storage	Up to 256 GB (M.2 hard drive interface)	
Maximum built-in memory for containers	1.5 GB	
Basic functions	<ul style="list-style-type: none"> • Supports LXC and Docker • Installing, uninstalling, starting, and stopping apps • Installing, uninstalling, starting, and stopping containers • Upgrading apps in overwrite mode and incremental mode 	
Advanced functions	<ul style="list-style-type: none"> • Allocating CPU cores to containers • Adjusting container storage and memory resources • Deploying multiple containers interconnected through message buses 	
Security functions	<ul style="list-style-type: none"> • Container disk encryption • Container and app signature verification 	
IoT protocols	<ul style="list-style-type: none"> • MQTT • CoAP 	
Support for secondary development	<ul style="list-style-type: none"> • Standard Debian-based development environment, support for secondary development • Mainstream programming languages: C/C++, etc. 	
Software parameters		
Basic features	<ul style="list-style-type: none"> • IPv4 • TCP/UDP • Socket • ARP • ICMP • DHCP • NAT • NETCONF 	
Unicast routing	Static route	

Specification	AR502H	NetEngine AR502H-5G
Security and reliability	<ul style="list-style-type: none"> • Non-privileged container • Protocol packet protection • ACL • CPU attack defense • Blacklist/Whitelist • Packet filtering firewall • Key component management • Hardware random number • Dual-partition backup • Hard drive data encryption 	
Configuration maintenance	<ul style="list-style-type: none"> • CLI, SSH v2 terminal • User operation logs • System status monitoring • Remote management through Agile Controller-IoT • USB-based deployment 	
Firmware management	Local and remote firmware upgrade	
Event alarm	System log	

Specification	iCUBE-PLC100
Hardware parameters	
Operating temperature	-40°C to +70°C
Relative operating humidity	5% to 95% (non-condensing)
Storage temperature	-40°C to +85°C
Rated voltage range	200 V AC to 240 V AC (phase-A power supply)
Working frequency	50 Hz/60 Hz
Output power	36 W
Maximum power consumption	< 6 W
Power output port	12 V DC (industrial terminal)
Ethernet port	<ul style="list-style-type: none"> • 100 Mbps (RJ45) • Connecting to the AR502H through the Ethernet port (used for internal cascading)
Fixed serial interface	1 x RS485 (isolated)

Specification	iCUBE-PLC100
IP rating	IP40
LED indicators	<ul style="list-style-type: none"> • 1 x PWR • 1 x SYS • 1x Tx • 1 x Rx
Dimensions (H x W x D)	44 mm x 150 mm x 133 mm (1.73 in. x 5.91 in. x 5.24 in.)
Net weight	0.5 kg
PLC-IoT interface parameters	
Protocol compliance	<ul style="list-style-type: none"> • IPv6, 6LoWPAN • DTLS • CoAP
PLC type	Huawei broadband PLC
Modulation format	OFDM
Frequency range	0.7 to 12 MHz
PLC cable connection	Three-phase four-wire
Tx power	PSD ≤ -45 dBm/Hz
Receive sensitivity	> 0.2 mVpp
Application-layer rate	100 kbps to 1.8 Mbps
Software parameters	
Networking	<ul style="list-style-type: none"> • Multi-level networking • Automatic traffic steering • Dynamic topology optimization • Star networking topology • Domain-based networking: Each PLC end module can form independent networks of different domains in the same frequency band, without interference.
IPv6	<ul style="list-style-type: none"> • Access to PLC nodes based on IPv6 addresses • 6LoWPAN compression and fragmentation
Deployment of plug-and-play devices	Plug-and-play low-voltage devices
Transformer district identification	Software-based transformer district identification
Power outage reporting	Supported

Specification	iCUBE-PLC100
Access authentication	<ul style="list-style-type: none"> Digital certificate-based authentication (authentication with the AR502H) DTLS authentication (authentication with the AR502H)
Data security	<ul style="list-style-type: none"> AES128-based data encryption Integrity check
Whitelist	<ul style="list-style-type: none"> Enabling and disabling a whitelist Adding records to, deleting records from, and querying records in a whitelist Configuring a whitelist based on the module MAC address, module serial number, and end device ID
Management and maintenance	<ul style="list-style-type: none"> Configuring and querying PLC network parameters, such as the network topology Remotely obtaining PLC site information Self-healing of PLC networks and PLC sites

Power Specifications

60 W power supply



Specification	Power Adapter
Power specifications	<p>Power input (integrated high-voltage AC/DC):</p> <ul style="list-style-type: none"> 88 V DC to 300 V DC (industrial terminal) 90 V AC to 264 V AC (industrial terminal) <p>Power output:</p> <ul style="list-style-type: none"> 12 V DC (industrial terminal)
Power	60 W
Weight	0.9 kg
Dimensions (H x W x D)	40 mm x 150 mm x 133 mm (1.57 in. x 5.91 in. x 5.24 in.)
Storage temperature	-40°C to +85°C
Operating temperature	-40°C to +70°C

Specification	Power Adapter
Installation mode	Installed on the DIN rail
Operating humidity	5% to 95% (non-condensing)

Ordering Information

Code	Ordering Information
Device	
AR502H	Router,AR502H 2*RS485(or 2*RS232),1*DI/DO,3*GE (10/100/1000M RJ45),2*GE COMBO,1*LTE (dual SIM),1*USB3.0,GPS/GLONASS/BDS,9.6-60VDC
AR502H-5G	Router,AR502H-5G 2*RS485(or 2*RS232),1*DI/DO,3*GE (10/100/1000M RJ45),2*GE COMBO,1*5G(dual SIM),1*USB3.0,GPS/GLONASS/BDS,9.6-60VDC
Accessories (optional)	
iCUBE-PLC100	Modem,iCUBE-PLC100 1*RS485,1*FE,90-264VAC,External,90-264VAC,NULL <i>Note: This model cannot be used in the Japanese market (110 V voltage).</i>
Power supply	
PAC-60WB	Function Module,AC Adapter,PAC-60WB,60W AC Power Module(No Fan) <i>Note: If the iCUBE-PLC100 is configured, this power module does not need to be configured.</i>
4G Antennas	
ASMAM0006	Omni-directional Antenna,698MHz-960MHz/1710MHz-2690MHz,1.0dBi(698MHz-960MHz)&3dBi(1710MHz-2690MHz),10W,SMA-J
5G Antennas	
ASMBF5G00	Omni-directional Antenna,698-960MHz/1710-2690MHz/3300-5000Mhz,2.0dBi(698-821MHz)&3dBi(824MHz-5000MHz),Vertical polarization,omnidirectional,5W,SMB-K,No bracket
A00NF5G00	Omni-directional Antenna,698MHz-960MHz/1710MHz-2700MHz/3400MHz~5000MHz,2dBi/3dBi/3dBi,linear polarization,Isotropic,20W,N/Female-4 Ports,with bracket,IP65
GPS Antennas	
ASMAM0015	Omni-directional Antenna,1555~1610 MHz,38+/-2 dB,right-handed circular polarization,Omni-directional,N/Female,No rack
WM1NANTENN07	Omni-directional Antenna,1555~1610 MHz,38+/-2 dB,right-handed circular polarization,Omni-directional,N/Female,No rack
Installation materials	
DINRAIL002	metals,DKBA61542001.ASM,mounting base,machining

More Information

For more information, visit <https://e.huawei.com/en/> or contact us in the following ways:


- Global service hotline: <https://e.huawei.com/en/service-hotline-query>

- Logging in to the Huawei Enterprise technical support website: <https://support.huawei.com/enterprise/en/index.html>
- Sending an email to the customer service mailbox: Support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2021. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China
Website: www.huawei.com